
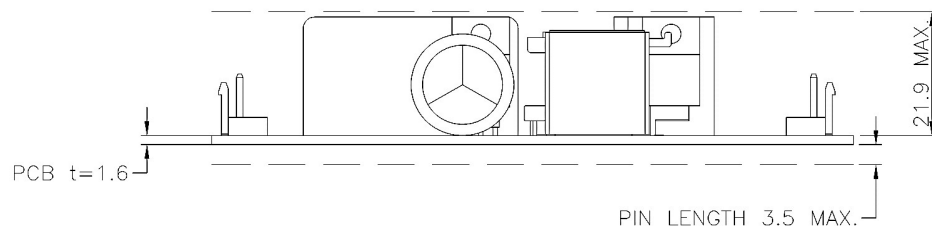


品名	FSP050-P25J-A05	FSP050-P25J-A12	FSP050-P25J-A15	FSP050-P25J-A24
定格入力電圧	AC 100~240V	AC 100~240V	AC 100~240V	AC 100~240V
入力電圧範囲	AC 85~264V	AC 85~264V	AC 85~264V	AC 85~264V
定格入力電流	0.88A typ (AC 100V, Load 8.0A) 0.48A typ (AC 230V, Load 8.0A)	1.05A typ (AC 100V, Load 4.3A) 0.57A typ (AC 230V, Load 4.3A)	1.1A typ (AC 100V, Load 3.4A) 0.6A typ (AC 230V, Load 3.4A)	1.05A typ (AC 100V, Load 2.1A) 0.57A typ (AC 230V, Load 2.1A)
出力電圧	5.0V	12.0V	15.0V	24.0V
出力電流範囲	0~8.0A	0~4.3A	0~3.4A	0~2.1A
動作周囲温度 (デレーティング領域含む)	-20~+70°C	-20~+70°C	-20~+70°C	-20~+70°C
外形寸法	L112 × W50 × H21.9mm	L112 × W50 × H21.9mm	L112 × W50 × H21.9mm	L112 × W50 × H21.9mm
質量	120g max	120g max	120g max	120g max
安全認証	cCSAus, CE	cCSAus, CE	cCSAus, CE	cCSAus, CE
安全基準	UL62368-1, EN62368-1, PSE準拠	UL62368-1, EN62368-1, PSE準拠	UL62368-1, EN62368-1, PSE準拠	UL62368-1, EN62368-1, PSE準拠

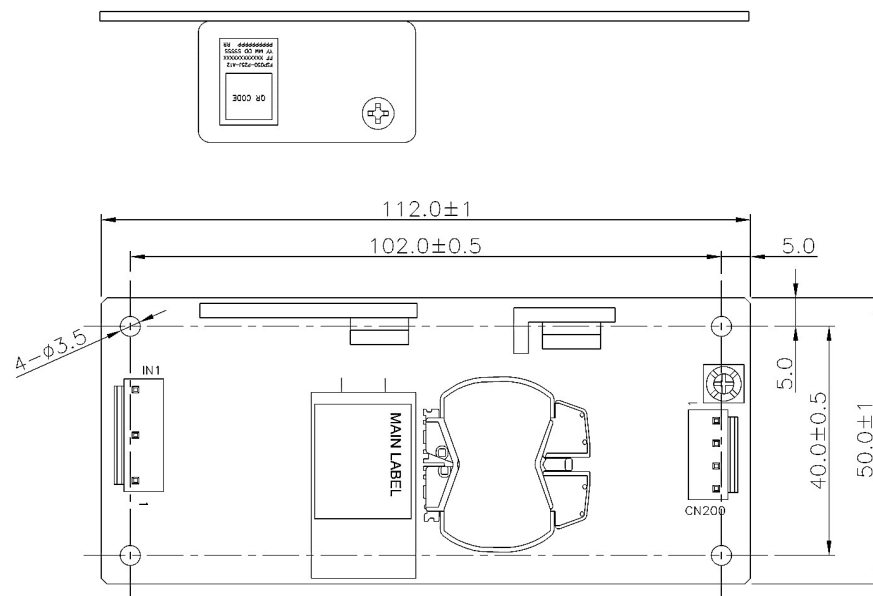

Pin assignment of IN1

Pin No.	Function	Wafer
1	L	JST B3P5-VH or EQUIVALENT
2		
3	N	
4		
5	FG	

Pin assignment of CN200

Pin No.	Function	Wafer
1	-V	JST B4P-VH or EQUIVALENT
2	-V	
3	+V	
4	+V	

UNIT: mm

名称

50W 定電圧電源 : 5V型/12V型/15V型/24V型

図番

FSP050-P25J-Axx